


RITE-SIZE



SEMI-CIRCULAR DETENTS POSITIVELY LOCATE EVERY VERTICAL BAR

RITE-SHAPE

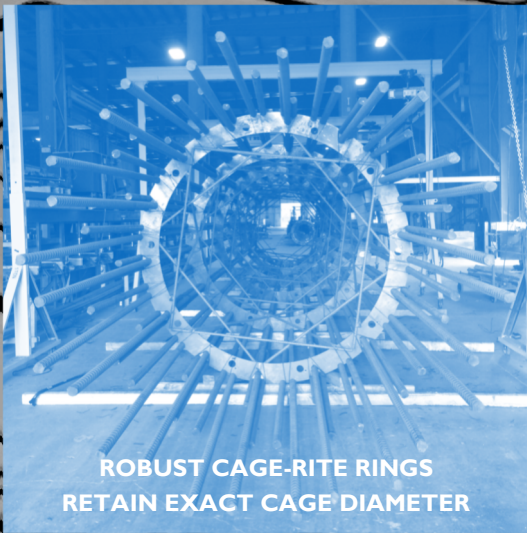

ROBUST CAGE-RITE RINGS RETAIN EXACT CAGE DIAMETER

RITE-ON-TIME



ACCELERATE SCHEDULE AND IMPROVE SITE SAFETY



**DIMENSION**

DIMENSION FABRICATORS, INC.

THE **CAGE-RITE** CAGE BRACING SYSTEM TRANSFORMS THE CAGE MANUFACTURING PROCESS. COMPRISED OF ROBUST STEEL RINGS WITH SEMI-CIRCULAR DETENTS THAT POSITIVELY LOCATE EVERY VERTICAL BAR AND CSL PIPE; THE VERTICAL BAR SPACING AND ALIGNMENT ARE CONTROLLED TO JUST A FEW THOUSANDTHS OF AN INCH. THE CAGE-RITE SYSTEM ENSURES THAT EVERY CAGE:

- IS EXACTLY ROUND
- RESISTS RACKING
- CONFORMS PRECISELY TO ALL DIMENSIONAL TOLERANCES.

***BRING THE PRECISION OF DIMENSION FABRICATORS' MANUFACTURED CAGES TO YOUR SITE-BUILT ASSEMBLIES.***

***CONTACT DIMENSION ABOUT USING THE CAGE-RITE SYSTEM ON YOUR NEXT PROJECT.***

***NOW SHIPPING NATIONWIDE***

**WWW.CAGERITE.COM**

**1-(800) BIG-REBAR**

MADE IN USA



**MANUFACTURED USING 100% SOLAR ENERGY**



## REBAR CAGE BRACING SYSTEM

## DIMENSION

The *CAGE-RITE* cage bracing system transforms the rebar cage construction process. *CAGE-RITE* by Dimension Fabricators is an internal cage bracing system comprised of steel rings with semicircular detents that positively locates every vertical bar and csl pipe.

When it comes to rebar cages, one size does not fit all. Each *CAGE-RITE* is custom detailed to the constraints of the concrete and reinforcing elements.

### ADVANTAGES

- Enhances jobsite safety
- Accelerates productivity
- Resists loads imposed during construction, transportation, lifting and placement
- Conforms precisely to all dimensional tolerances

### APPLICATIONS

- Drilled shafts
- Columns
- Pier Caps
- Beams

### AVAILABILITY

- 1' to 14' in diameter
- Uncoated (ASTM A615)
- Epoxy Coated (ASTM A775)
- Epoxy Coated (ASTM A934)
- Galvanized (ASTM A767)

### PLACEMENT


- *CAGE-RITE* elements shall be approximately 10'-0" long, and spaced at 20'-0" on center.
- First ring element shall be placed approximately 5'-0" from top of cage
- Last *CAGE-RITE* bracing ring shall be 10'-0" or less from bottom of cage.
- One additional "*DEAD-RING*" (with no bracing to adjacent ring) shall be added to the cage in order to maintain approximate 10'-0" spacing on *CAGE-RITE* rings.

### EXAMPLES

- 60'-0" cage shall have [3] *CAGE-RITES*
- 80'-0" cage shall have [4] *CAGE-RITES*
- 90'-0" cage shall have [4] *CAGE-RITES* and [1] *DEAD-RING*
- 25'-0" cage (or less) shall have [1] *CAGE-RITE*, centered in cage



CAGE-RITE DEAD RING

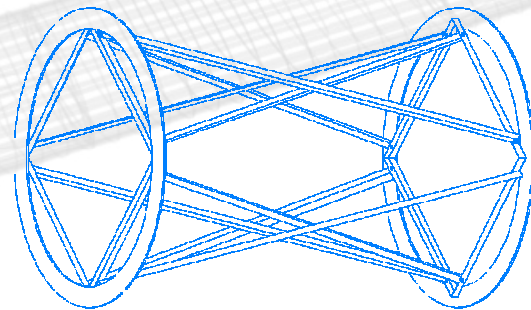

CAGE-RITE BRACING SYSTEM



WWW.CAGERITE.COM

 **MANUFACTURED**  
USING 100% SOLAR ENERGY

1-(800) BIG-REBAR